

DART SERVICE BULLETIN SB10-4

AFFECTING D206-628-013/-014 HELI-ACCESS-STEP™ AT CHG 005 OR EARLIER

REF FAA STC: SA00500SE

REF TCCA STC: SH98-14

REF EASA STC EASA.IM.R.S.01339

Purpose:

Unmodified D206-628-013/-014 Step Installations at change 005 (or earlier) will not install at the height required for compatibility with Apical Tri-bag Floats. D206-628-013/-014 steps installed with OEM floats (at 15.00" height) are unaffected.

Change:

For customers with D206-628-013/-014 Step Installations at change 005 (or earlier) and Apical Tri-Bag Floats, the step must be installed at least 17.00" high from the ground to prevent interference with the floats when they are deployed.

The DSI-9500-011 lug upgrade kit is available to update existing D206-628-013/-014 steps to change 006. The kit contains additional lugs that allow the step to be installed at 17.25" height. D206-628-013/-014 steps installed with OEM floats (at 15.00" height) do not require the kit.

Please refer to Dart Service Instruction **DSI 9500 rev. A** for more information on the upgrade kit, parts list, and installation changes.

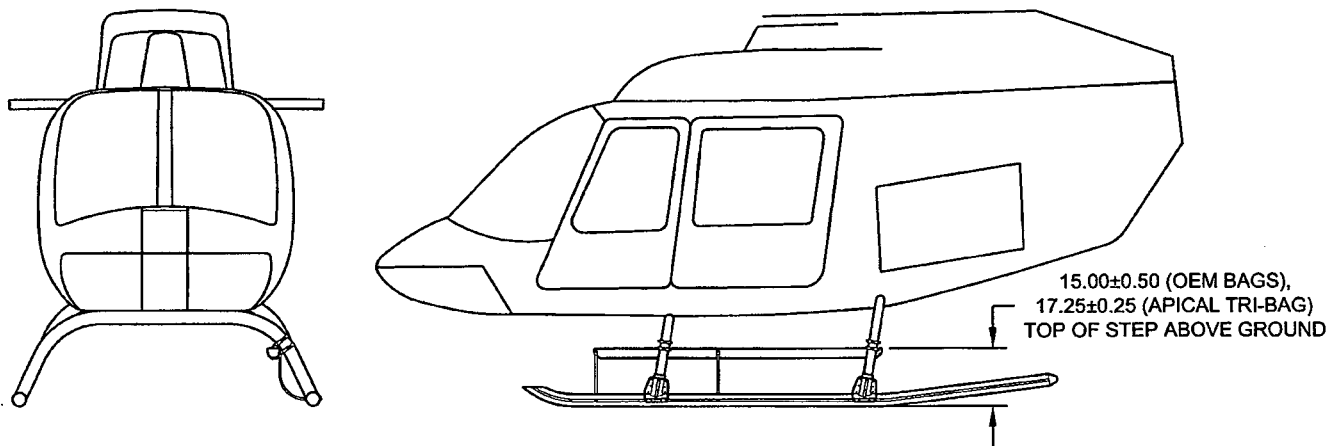


FIGURE 1

D206-628-013 (SHOWN) / -014 (OPPOSITE)
206 A/B FLOAT STEP INSTALLATION

A	NEW ISSUE	CP	10.07.07
REV.	DESCRIPTION		BY DATE
DESIGN	9P	DART AEROSPACE USA, INC	
DRAWN	9P	PORT HADLOCK, WA	
CHECKED	h	DRAWING NO.	REV. A
MFG. APPR.	N/A	SB10-4	SHEET 1 OF 1
APPROVED	10/7/07	TITLE	SCALE
DE APPR.	10/7/07	SERVICE BULLETIN	NTS
DATE	10.07.07	COPYRIGHT © 2010 BY DART AEROSPACE USA, INC	
THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE USA, INC.			